

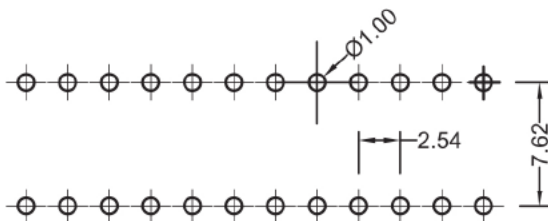
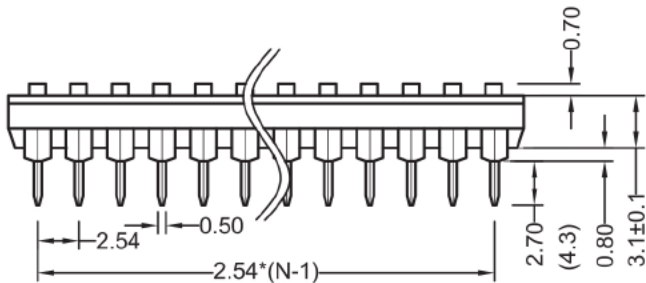


Specifications

Rating:	100mA 50VDC non switching, 25mA 24VDC switching
Contact Resistance:	100mΩ Max
Insulation Resistance:	100MΩ Min
Dielectric Strength:	300VAC 1 minute
Operating Temperature:	-25°C to +70°C
Electrical Life:	1000+ Cycles
Operating Force:	8N max



P.C.B. LAYOUT

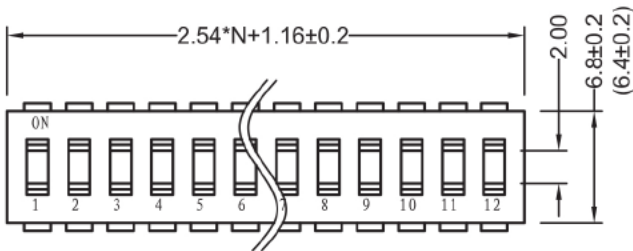