
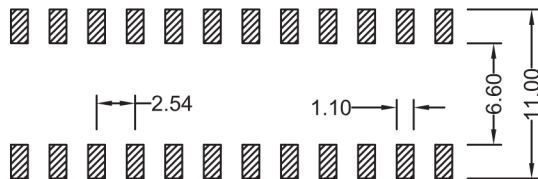
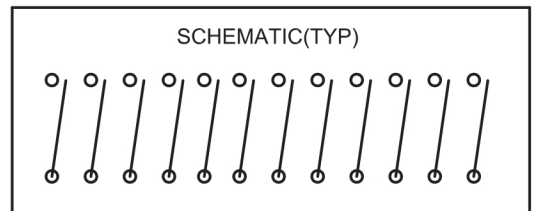


## Specifications

Rating:	25mA 24VDC (switching), 100mA 50VDC (steady state)
Contact Resistance:	100mΩ Max
Insulation Resistance:	100MΩ Min
Dielectric Strength:	300VAC
Operating Temperature:	-40°C to +85°C
Electrical Life:	1000+ Cycles
Operating Force:	8N Max

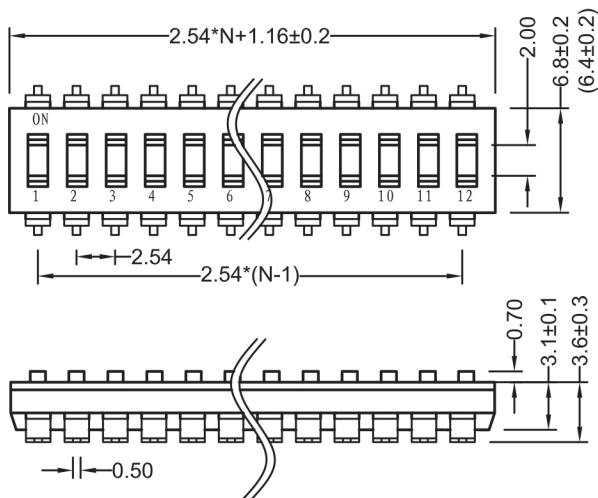

Description	Ref Code
4 Way SMD DIL Switch 2.54mm	483051