


Manufactured in UK

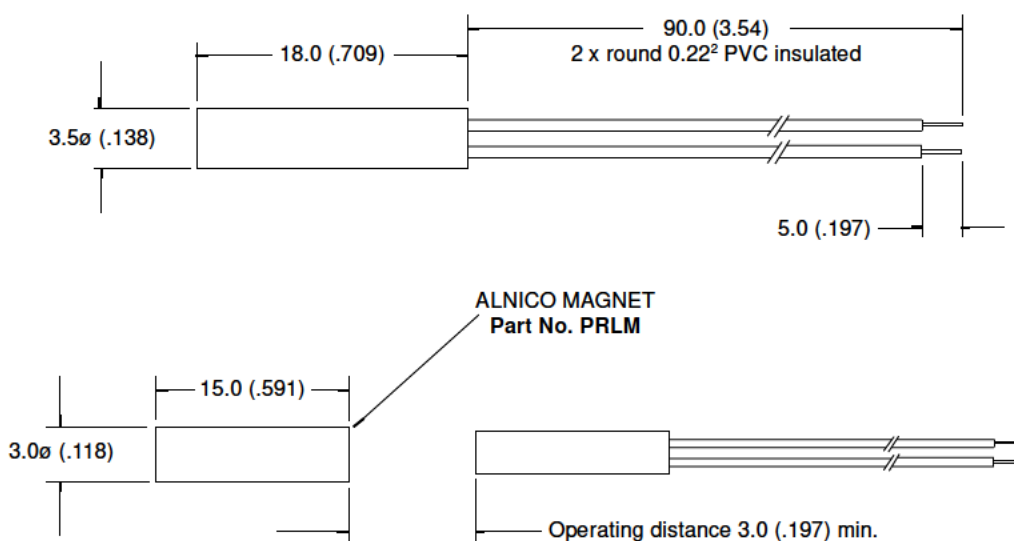

Drawings not to scale
All dimensions in mm (inches) nominal

Different magnets will give varying operating distances.

SPECIFICATION

CONTACT FORM/STYLE		Normally Open
SWITCHING VOLTAGE	Max. Vac	140
SWITCHING CURRENT	Max. A	0.5
SWITCHING CAPACITY (RESISTIVE)	Max. VA	10
CONTACT RESISTANCE	Max. mΩ	115
SWITCHING DISTANCE	Min. mm	3
OPERATING TEMPERATURE		
CONTINUOUS	Deg. °C	-20° +85°
INTERMITTENT	Deg. °C	-20° +105°
STORAGE TEMPERATURE	Deg. °C	-25° +90°
CASE MATERIAL		Polypropylene

This product is fully sealed to give maximum mechanical protection and minimise the ingress of dust and moisture. As a guide, the product is expected to meet the requirements of IP65.

PROXIMITY - Reed Switch - Cylindrical - Plastic

PART NUMBER
S1372