


FUSE

Thermal Fuse Series

Rated Voltage: AC250V/AC125V;
 Rated Current: 5A ~ 7A
 Electric intensity: 800V Min.
 Contact resistance: 30mΩ Max.
 Insulation resistance: 100MΩ Min.
 Response speed: $\leq 1^{\circ}\text{C}/\text{min}$
 Number of automatic cycles: 6000 Max. (Resistive Load)

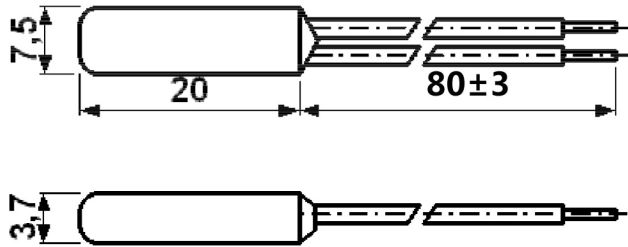

Code	Action temperature (°C)	Reset temperature	Voltage AC(V)	Current (A)
55	55±5	≥30±10	250	5
60	60±5	40±10	250	5
65	65±5	45±10	250	5
70	70±5	50±10	250	5
75	75±5	55±10	250	5
80	80±5		250	5
85	85±5		250	5
90	90±5		250	5
95	95±5		250	5
100	100±5		250	5

Code	Action temperature (°C)	Reset temperature	Voltage AC(V)	Current (A)
105	105±5		250	5
110	110±5		250	5
115	115±5		250	5
120	120±7		250	5
125	125±7		250	5
130	130±7		250	5
135	135±7		250	5
140	140±7		250	5
145	145±7		250	5
150	150±7		250	5
			250	5
			250	5