




Specifications

Rating:	100mA 50VDC non switching, 25mA 24VDC switching
Contact Resistance:	50mΩ Max
Insulation Resistance:	100MΩ Min
Dielectric Strength:	500VAC 1 minute
Operating Temperature:	-20°C to +70°C
Electrical Life:	2000+ Cycles
Operating Force:	9.8N max

Model No.	No. Pos.	A
DP-01	1	4.10
DP-02	2	6.64
DP-03	3	9.18
DP-04	4	11.72
DP-05	5	14.26
DP-06	6	16.80
DP-07	7	19.34
DP-08	8	21.88
DP-09	9	24.42
DP-10	10	26.96
DP-12	12	32.04

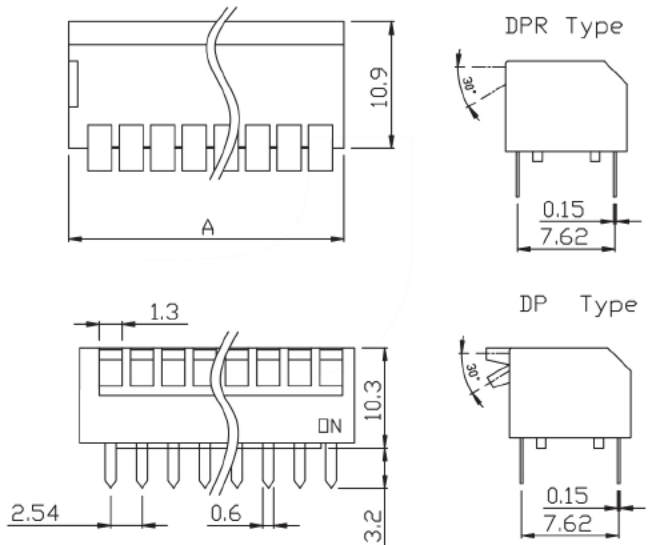

PCB LAYOUT