


Specifications

Rating:	0.1A 30VDC
Contact Resistance:	30mΩ Max
Insulation Resistance:	100MΩ Min
Dielectric Strength:	250VAC 1 minute
Operating Temperature:	-40°C to +80°C
Electrical Life:	50,000+ Cycles
Operating Force:	160gf

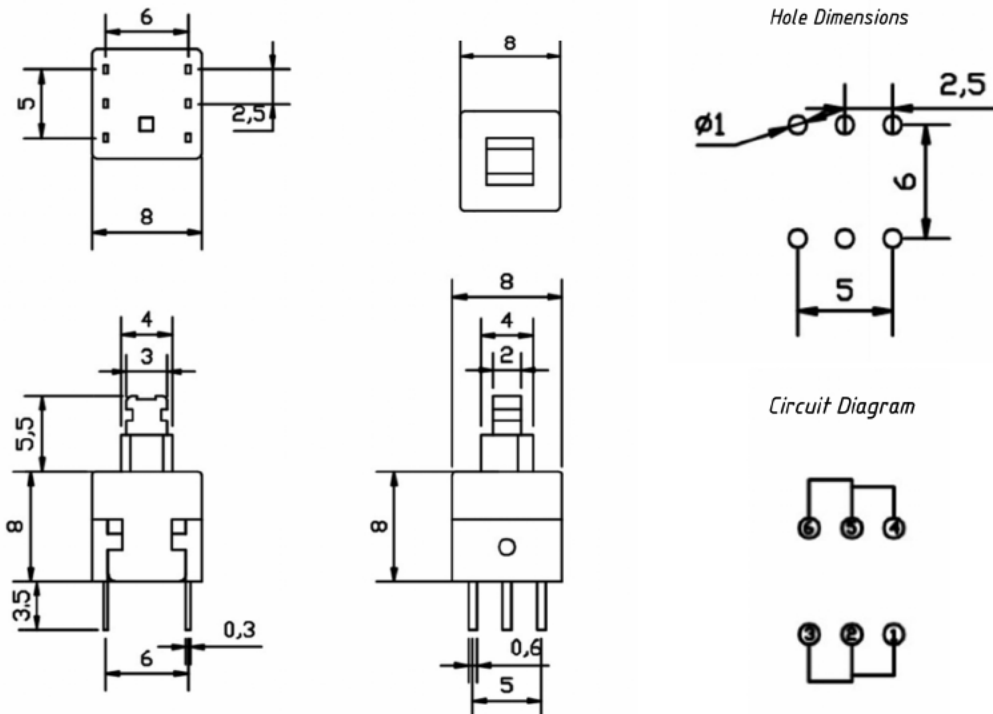

Description	Ref Code
8x8mm Momentary PCB Push Switch 0.1A 30VDC	483103