

# IC series

Pushbutton switches for harsh environments •  
short case • bushing Ø 12 mm • momentary



## DISTINCTIVE FEATURES

Momentary with short case, reduced behind-panel depth

Tactile feedback

Flat round actuator for optional marking

Glossy actuator option (round curved only)

Sealed to IP67

## ENVIRONMENTAL SPECIFICATIONS

- Front panel sealing : IP67 according to IEC 60529
- Shock resistance : 100 g according to IEC 512-4, test 6c
- Vibration resistance : 10-500Hz - 10 g according to IEC 512-4, test 6d
- Salt spray : IEC 512-6, test 11f
- Robustness : IK06 according to EN 50102 (1 joule)
- Operating temperature : -40 °C to +85 °C (-40 °F to +185 °F)

## ELECTRICAL SPECIFICATIONS

- Max. current/voltage rating with resistive load :  
5 A 28 VDC, 70,000 cycles  
0.2 A 48 VDC, 500,000 cycles  
0.5 A 48 VAC, 500,000 cycles
- Initial contact resistance : 50 mΩ max.
- Insulation resistance : 1 GΩ min. at 500 VDC
- Dielectric strength : 1,500 Vrms 50 HZ between terminals

## GENERAL SPECIFICATIONS

- Panel thickness : 1.5 mm (.059) min. - 4 mm (.157 max.)
- Total travel : 1.7 mm (.067) ± 0.3 mm
- Typical operating force : 4 N ± 2 N
- Low level or mechanical life : 1,000,000 cycles
- Torque : 1,5 Nm max. applied to nut
- Soldering : 320 °C (608 °F) max. for 3 sec.

The company reserves the right to change specifications without notice.




# IC series

Pushbutton switches for harsh environments • short case • bushing Ø 12 mm • momentary


## MATERIALS

- Case : thermoplastic UL94-V0
- Actuator : polyamide 6/6
- Bushing/bezel : zinc die-cast (zamac), black painted
- Contacts : silver, gold plated
- Multi-wire leads AWG20, section 0.6 mm<sup>2</sup>
- Terminal seal : epoxy

## TERMINALS




Straight P



Quick-connect Z1


## ELECTRICAL FUNCTIONS



Function 3 (NO)


## MOUNTING

### PANEL CUT-OUT

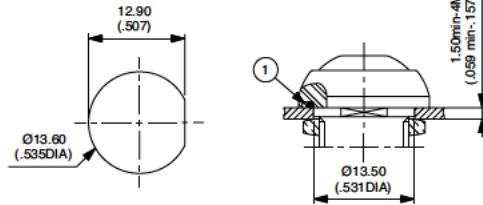


① - O-ring

### MATRIX MOUNTING




### BACK OF PANEL SPACE REQUIREMENT






Pushbutton switches for harsh environments • short case • bushing Ø 12 mm • momentary
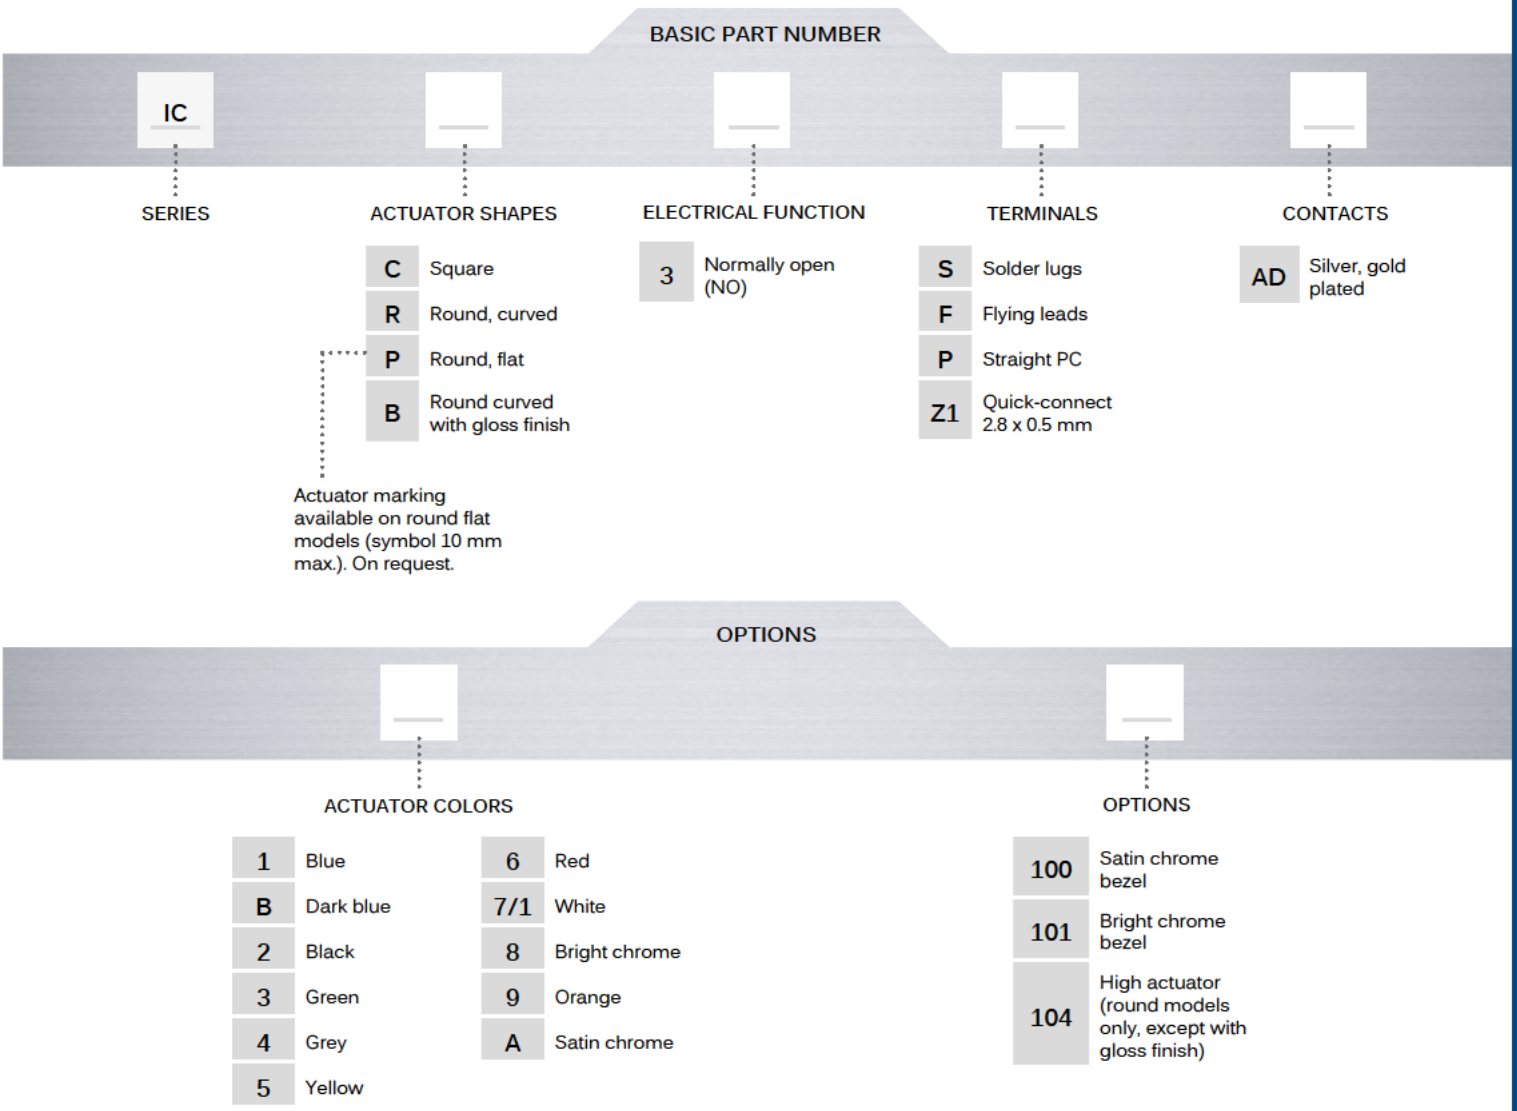
## BUILD YOUR PART NUMBER



## ABOUT THIS SERIES

On the following pages, you will find successively basic part numbers of switches and options in the same order as in above chart.


-  **Notice** : please note that not all combinations of above numbers are available. Refer to the following pages for further information.
-  **A sealing boot** is available to protect the switches against frost and sand (P/N U5125). See "Sealing Boots" section of website.
-  **Mounting accessories** : Standard hardware supplied : 1 hex nut 14 mm (,551) across flats and 1 O-Ring. Hex nut part number U166.

# IC series

Pushbutton switches for harsh environments • short case • bushing Ø 12 mm • momentary

## SQUARE - SOLDER LUG TERMINALS



ICC3SAD  Normally Open

Also available with straight PC terminals : ICC3PAD  
and quick-connect terminals : ICC3Z1AD


## SQUARE - FLYING LEAD TERMINALS




ICC3FAD  Normally Open

## ROUND - SOLDER LUG TERMINALS




Curved actuator  
ICR3SAD  Normally Open


Flat actuator  
ICP3SAD  Normally Open

Also available with straight PC terminals : IC•3PAD  
and quick-connect terminals : IC•3Z1AD


## ROUND - FLYING LEAD TERMINALS




Curved actuator  
ICR3FAD  Normally Open

Flat actuator  
ICP3FAD  Normally Open


→ FLAT

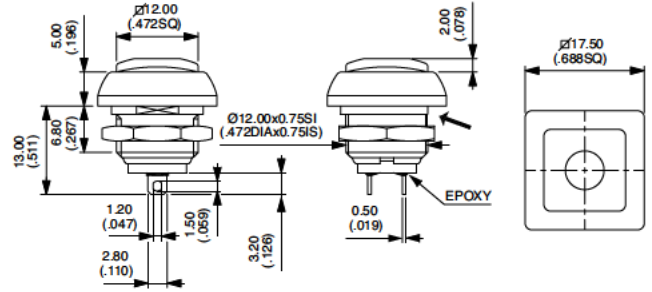


→ FLAT

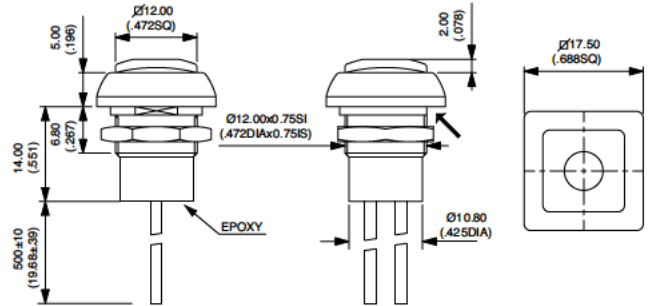

→ FLAT

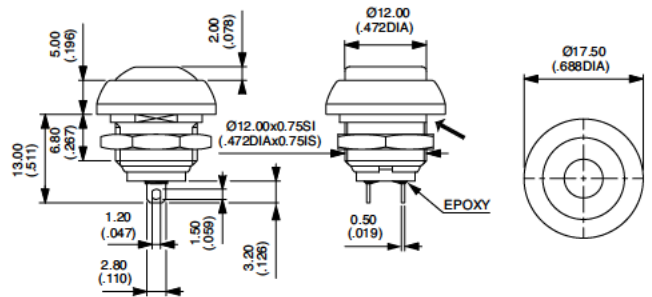

→ FLAT

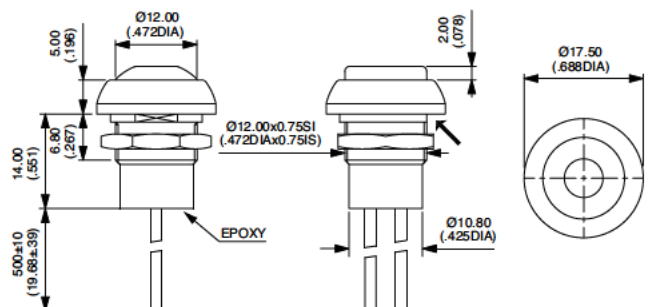


# IC series

Pushbutton switches for harsh environments • short case • bushing  $\varnothing$  12 mm • momentary

## ACTUATOR COLORS

BASIC P/N




- 1 Blue
- B Dark blue
- 2 Black
- 3 Green
- 4 Grey
- 5 Yellow
- 6 Red
- 7/1 White
- 8 Bright chrome
- 9 Orange
- A Satin chrome

## OPTIONS


BASIC P/N



- 100 Satin chrome bezel
- 101 Bright chrome bezel
- 104 High actuator (round models only, except with gloss finish)



104 IPR



104 IPP