


Specifications

Rating:	1.0VA
Contact Type:	1A
Pull In Value:	10-25AT
Drop Out Value	≥5AT
Contact Resistance:	≤200mΩ
Insulation Resistance:	≥100MΩ
Maximum Switching Voltage:	24VDC
Maximum Switching Current:	0.05A
Maximum Carry Current:	0.1A
Operate Time:	≤ 0.8mS
Bounce Time:	≤ 0.4mS
Release Time:	≤ 0.2mS
Operating Temperature:	-10°C to +40°C

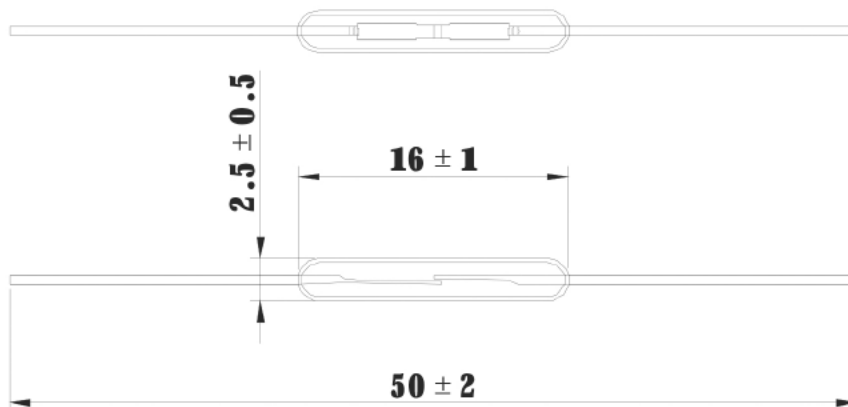

Description	Ref Code
Miniature SPST-NO Reed Switch 50mA 24VDC	482569