

# Vandal Resistant Switch $\Phi 16\text{mm}$



Anti-Vandal IK09/ Sealed IP65


Normal Open

Domed/ Flat/ High Flat


Stainless Steel/ Brass

1,000,000 Cycles Momentary

## Order Code

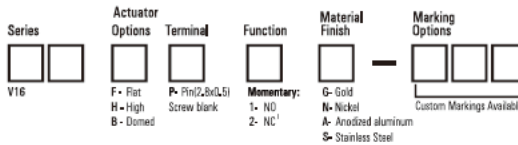


## Function




1): Screw terminal available.



## Suggested Panel Cutout

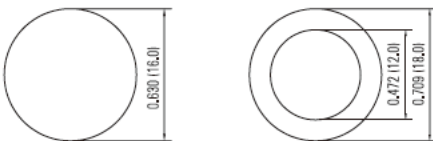

Max. Panel Thickness: 0.236 (6mm)

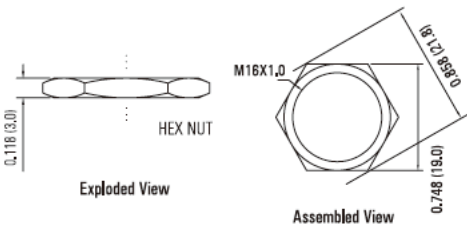

## Technical Data

Type	V16-F	V16-B	V16-H
Actuator Options	Flat	Domed	High Flat
Terminal	Screw/ Pin (2.8X0.5)		
Max. Switch Rating	2A 48VDC		
Contact Resistance	$\leq 50\text{m}\Omega$		
Insulation Resistance	$\geq 1000\text{m}\Omega$		
Dielectric Strength	2000VAC		
Operation Temp	$-20^\circ\text{C} \sim +55^\circ\text{C}$		
Mechanical Life	1,000,000 Cycles		
Electrical Life	200,000 Cycles		
Contact Material	Silver Alloy		
Torque	5 ~ 14Nm		
Operation Pressure	approx. 4N		
Protection	IP65/ IK08		
Material			
Actuator	Stainless steel/ Gold or Nickel plated brass/ Anodized aluminum		
Body	Stainless steel/ Gold or Nickel plated brass/ Anodized aluminum		
Base	PBT		

## Dimension

