


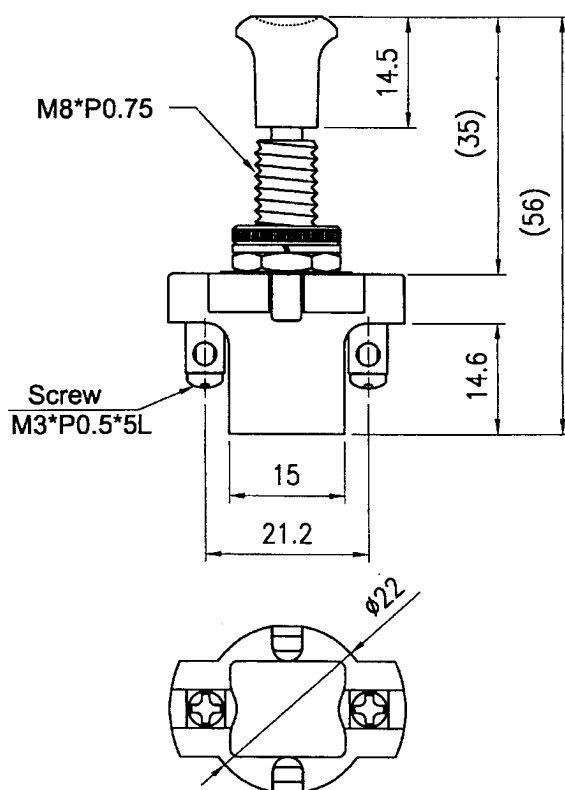


Rating	10A 12V DC		 2P SPST ON-OFF
Contact Resistance	50m ohm Max		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Switch Function	PUSH-OFF/PULL-ON		

Material:
 Frame: Black, PF
 Cover: Nickel Plated, SPCC
 Actuator: Black, ABS
 Screw: Nickel Plated, SS41



Tolerances ± 0.5 Unless Otherwise Specified