



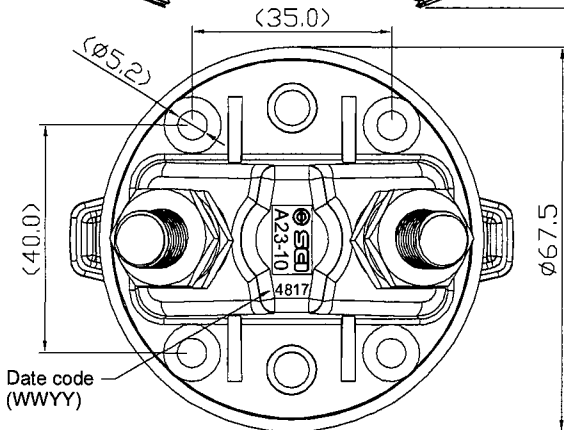
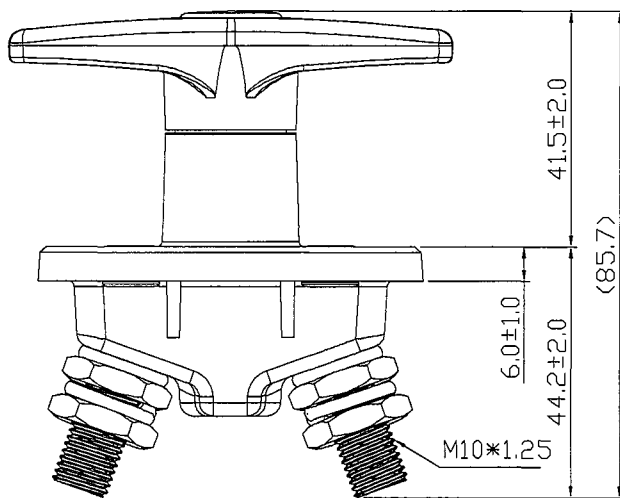


Continuous Rating	300 Amps 32VDC Max.	Key out	Circuit Diagram	
Intermittent Rating	450 Amps		OFF	ON
Cranking Rating	1000 Amps 10 seconds			
Contact Resistance	50m ohm Max			
Insulation Resistance	DC 500V 100M ohm Min			
Dielectric Strength	AC 1000V 1 minute,DC 2000V 1minute			
Operation Temperature	-30°C~+60°C			
Switch Function	2P SPST OFF-ON	OFF POSITION		

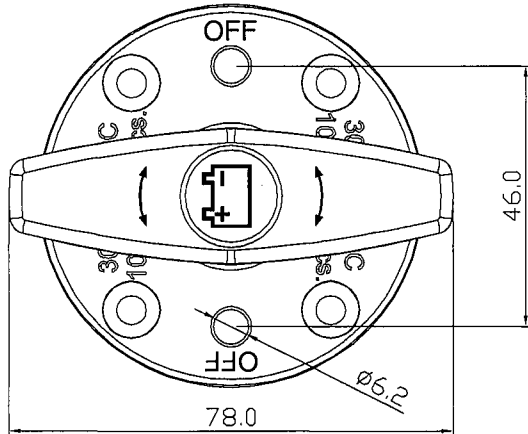

***MATERIAL:**

Housing: Black, PBT+15%GF
with White hot stamping

Actuator: Red, PBT+15%GF
with White painting



Bottom: Black, PBT+15%GF

Bolt: Copper

Hex Nut: Ni-plated, Brass

*Actuator can be taken out

*Ingress Protection: IP67 for panel seal

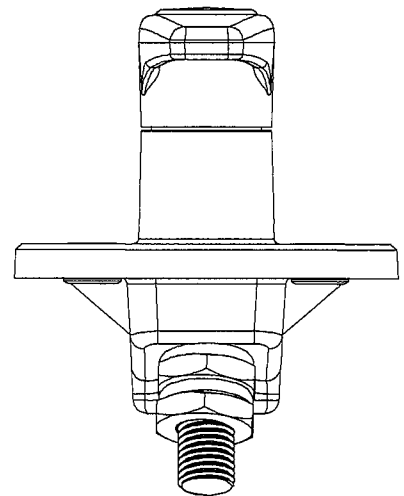

tolerances Unless otherwise specified ±0.5

C3\WORK14\A23-10