



SPECIFICATIONS:

CONTACT RATING : 5 AMPS @ 120 V AC or 28 V DC. (UL)
 2 AMPS @ 250 V AC (UL)
 0.4VA AMPS @20 V AC or DC.
 ELECTRICAL LIFE : 6,000 make-and-break cycles at full load.
 CONTACT RESISTANCE : 10 mΩ max. initial @ 2-4 V DC.
 100 mA, for both silver and gold plated contacts.
 INSULATION RESISTANCE : 1,000 MΩ min.
 DIELECTRIC STRENGTH : 1,000 V RMS @ sea level.
 OPERATING TEMPERATURE : -30 °C to 130 °C

MATERIALS:

CASE : Diallyl phthalate (DAP)(UL-94V-0).
 ACTUATOR : ZINC ALLOY.
 BUSHING : ZINC ALLOY.
 HOUSING : Stainless steel.
 TERMINAL/CONTACT : Brass, with silver or gold plated.
 or gold over silver.
 SWITCH SUPPORT : Brass, tin plated.

Schematic

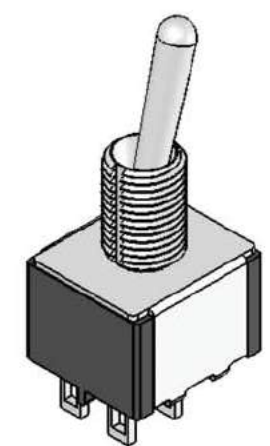

TOLERANCE	
XX.	± 0.5
X.	± 0.2
.X	± 0.2
.XX	± 0.2

REVISION	DESCRIPTION	REVISED BY	TOLEANCES .x± .xx±		ANGLE 1/2°	UNIT	mm	PART NAME	DWG NO
△			DRAWN BY	DESIGNED BY	SCALE			A SPEC DRAWING	
△			CHECKED BY	APPROVED BY	DATE	2010.10.28	PART NO		
△	2010.10.28 換新圖框, 重新出圖								