



RS 811 0736

Product Data Sheet

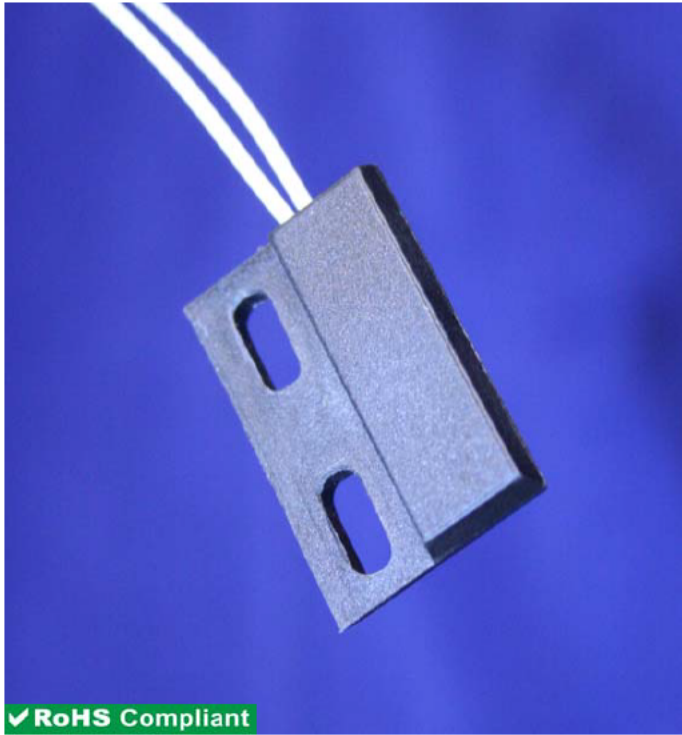

DIMENSIONS

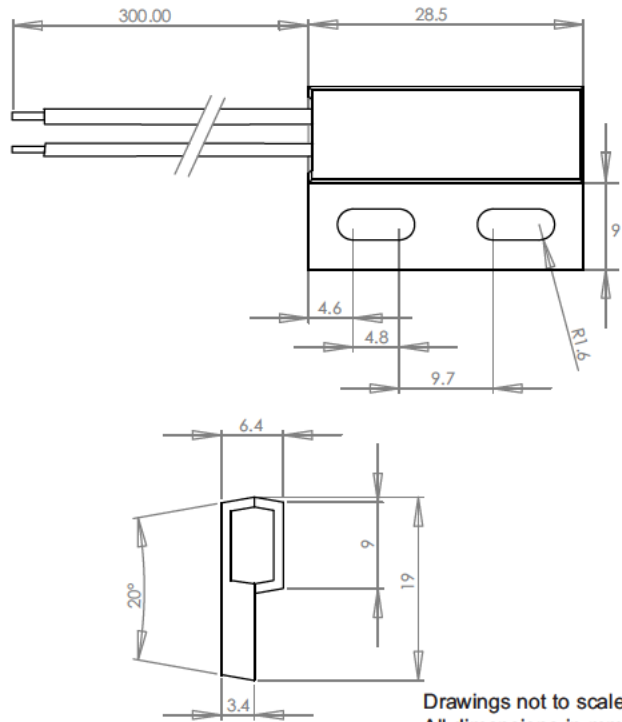

Drawings not to scale
All dimensions in mm nominal

SPECIFICATION

| | | |
|--------------------------------|--------------|--------------------------------|
| Contact Form / Style | | Normally Open |
| Switching Voltage | Max Volts AC | 250 |
| Switching Current | Max Amps | 0.5 |
| Switching Capacity (Resistive) | Max W/VA | 10 |
| Switching Distance | Min mm | 10 |
| Contact Resistance | Max mOhms | 150 |
| Operating Temperature | Celsius | - 40° to 105° |
| Case Material | | Glass filled Nylon (30% glass) |
| Cable | | 2 x20 AWG White PVC Insulated |

Applications Include

- Position and limit sensing.
- Linear actuators.
- Security system switch.
- Door Switch.

Options

- Also available with 2 core flex.
- Normally Closed & Changeover versions available.
- Custom cable types, cable lengths, connectors or crimp terminals available.
- If you do not see what you need, just ask, as there is a strong possibility we can do it !

| Rev. No. | Revision Note | Date | Signature |
|----------|---------------|----------|-----------|
| 1 | Datasheet | 24-04-14 | ML |