

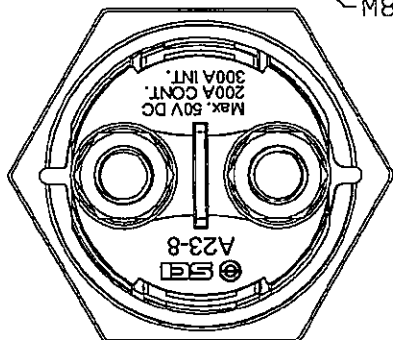
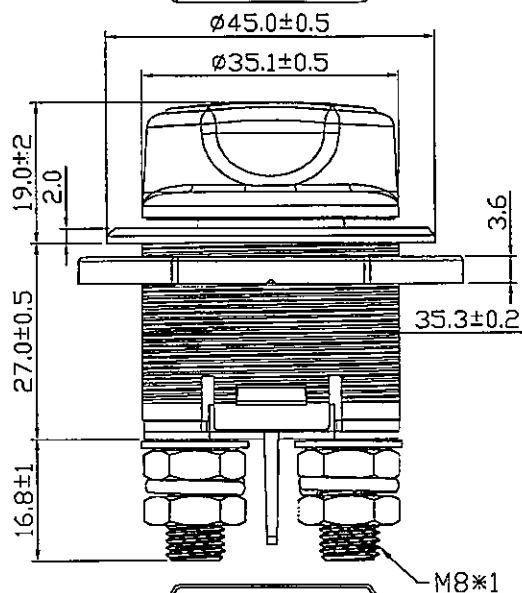




Continuous Rating	200Amps 50VDC Max.	Mounting Hole 	Circuit Diagram	
Intermittent Rating	300 Amps		OFF	ON
Cranking Rating	1000 Amps 5 sec.			
Contact Resistance	50m ohm Max			
Insulation Resistance	DC 500V 100M ohm Min			
Dielectric Strength	AC 1000V 1 minute, DC 2000V 1 minute			
Operation Temperature	-30°C~+60°C			
Switch Function	2P SPST OFF-ON			

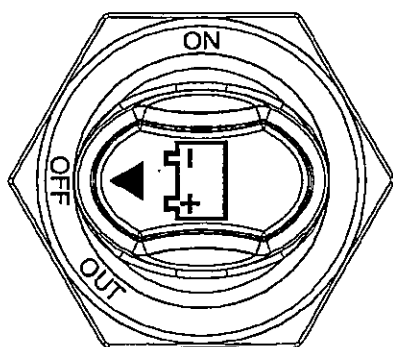

***MATERIAL:**

Housing: Black, PA#66+33%GF
with White hot stamping
Actuator: Red, PBT+15%GF
Name Plate: White, ABS
with Black hot stamping
Bottom: Black, PBT+15%GF
Nut: Steel
Bolt: Brass
Hex Nut: Ni-plated, Brass

***Waterproof: IP40**

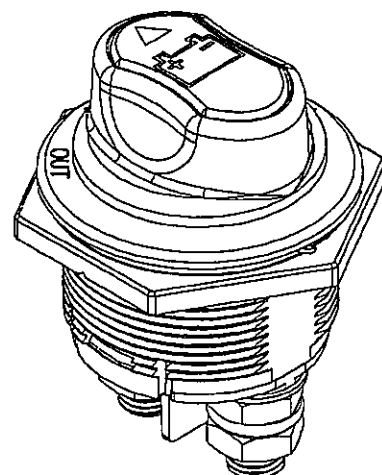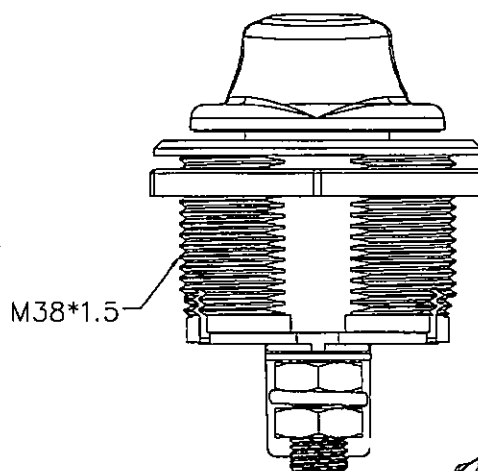

tolerances Unless otherwise specified ± 0.3

C3WORK14VA23-8BO