


Specifications

Rating:	16A 250VAC
Protection Level:	IP40
Operating Force:	200g
Contact Resistance:	25mΩ Max
Insulation Resistance:	100MΩ Min
Dielectric Strength:	1000VAC 1 minute
Operating Temperature:	-25°C to +80°C
Electrical Life:	100,000+ Cycles

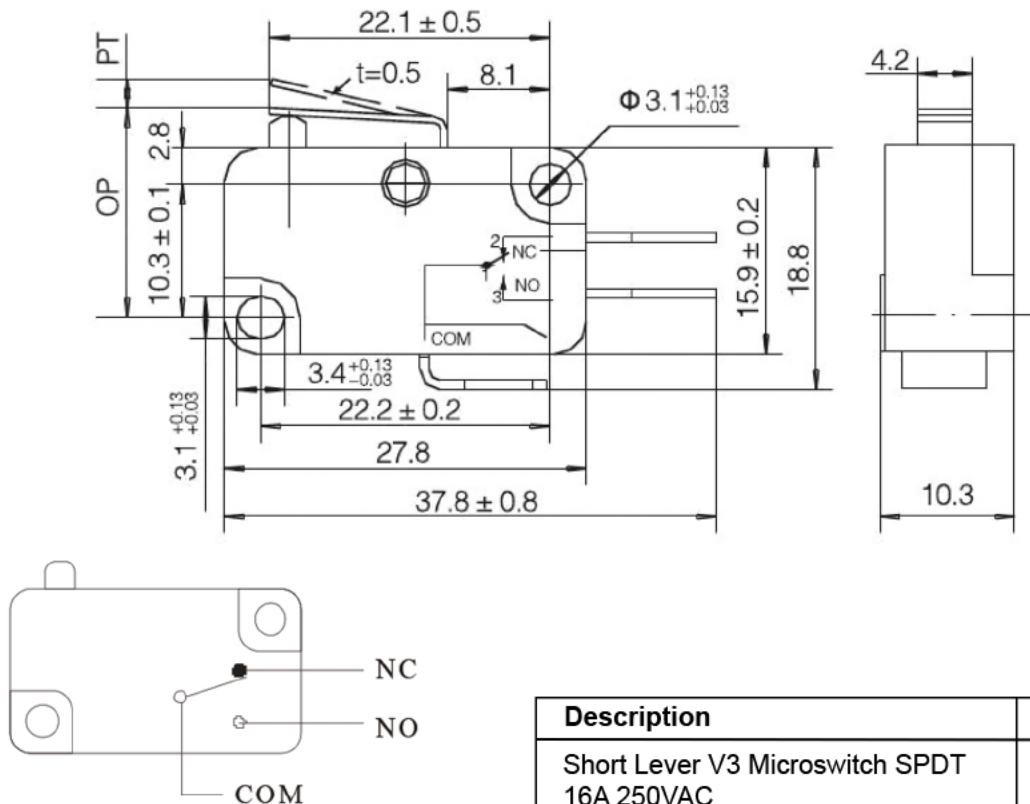

Description	Ref Code
Short Lever V3 Microswitch SPDT 16A 250VAC	480397