


Specifications

Rating:	5.0VA
Contact Type:	1C
Pull In Value:	45-65AT
Drop Out Value	≥ 12 AT
Contact Resistance:	≤ 200 m Ω
Insulation Resistance:	≥ 100 M Ω
Maximum Switching Voltage:	60VDC
Maximum Switching Current:	0.3A
Maximum Carry Current:	1A
Operate Time:	≤ 1.5 mS
Bounce Time:	≤ 1 mS
Release Time:	≤ 0.5 mS
Operating Temperature:	-10°C to +70°C

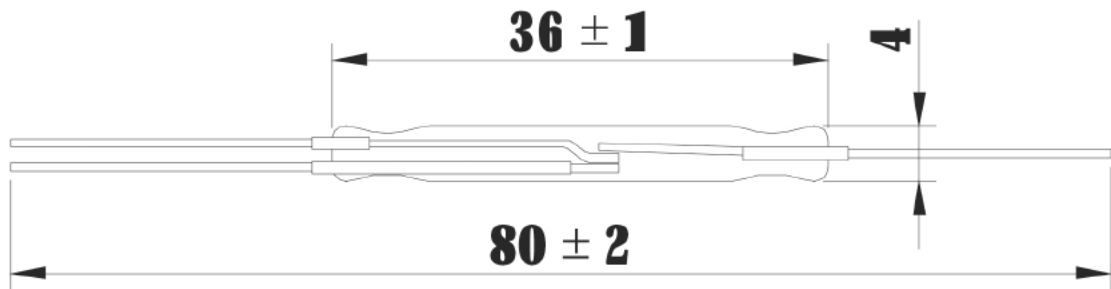

Description	Ref Code
SPDT Reed Switch 0.3A 60VDC	482567