


## Specifications

Rating:	10.0VA
Contact Type:	1C
Pull In Value:	40-80AT
Drop Out Value	≥15AT
Contact Resistance:	≤200mΩ
Insulation Resistance:	≥100MΩ
Maximum Switching Voltage:	100VDC
Maximum Switching Current:	0.5A
Maximum Carry Current:	2A
Operate Time:	≤ 1.5mS
Bounce Time:	≤ 1mS
Release Time:	≤ 0.5mS
Operating Temperature:	-10°C to +70°C

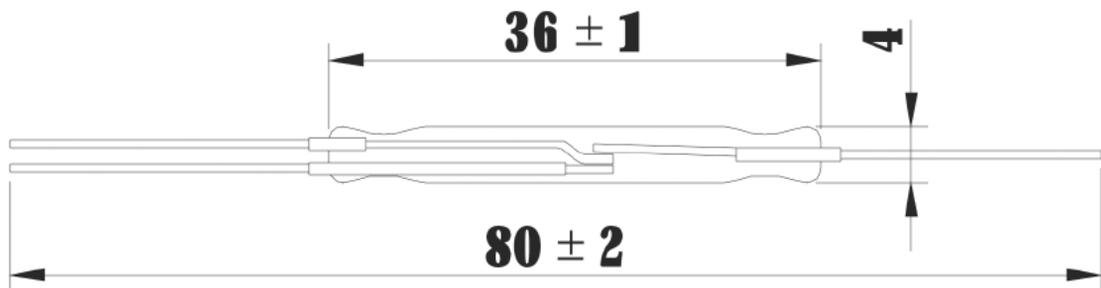

Description	Ref Code
SPDT Reed Switch 0.5A 100VDC	482568