


Specifications

Rating:	3.0VA
Contact Type:	1A
Pull In Value:	40-70AT
Drop Out Value:	≥15AT
Contact Resistance:	≤200mΩ
Insulation Resistance:	≥100MΩ
Maximum Switching Voltage:	30VDC
Maximum Switching Current:	0.1A
Maximum Carry Current:	0.3A
Operate Time:	≤ 1mS
Bounce Time:	≤ 1mS
Release Time:	≤ 0.5mS
Operating Temperature:	-10°C to +60°C

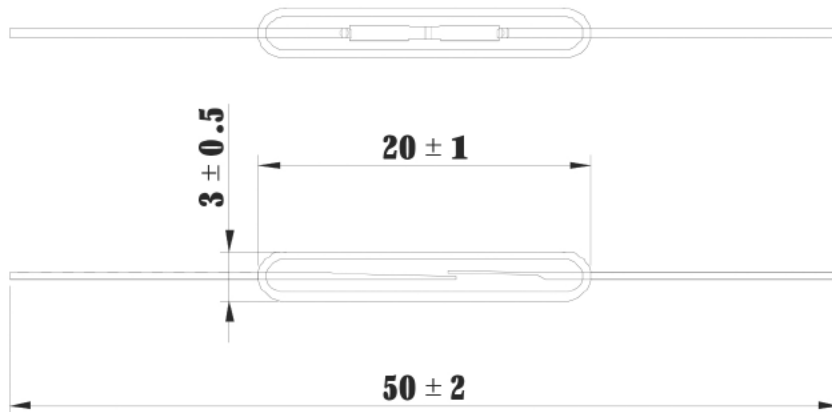

Description	Ref Code
SPST-NO Reed Switch 0.1A 30VDC	482570