


Part Number: KSK-GR501
Reed Switch - Sub-Miniature - Normally Open Contacts
Product Data Sheet

PICTURE



DIMENSIONS

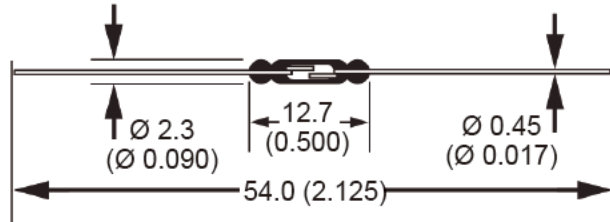

Drawings not to scale.
 All dimensions in mm (inches) nominal.

✓RoHS Compliant

SPECIFICATION

Contact Form		Form A (Normally Open)
Switching Capacity	Max.	10 VA
Switching Voltage	Max.	200 VAC/DC
Switching Current	Max.	0.5 A
Carrying Current	Max.	1.0 A
Dielectric Strength	Min.	0.25 kVDC
Contact Resistance	Max.	150 mOhms
Insulation Resistance	Min.	10 ¹⁰ Ω
Pull - In Sensitivity		10 - 35 AT
Bounce Time	Max.	0.5 ms
Release Time	Max.	0.1 ms
Vibration (10-1000Hz)		50 g
Shock (11 ms)		100 g
Capacitance	Typ.	0.3 pF
Operate Temperature Range		-40°C + 125°C
Test Coil	Type	KMS01

NOTE

- When cutting or bending switch leads it is important that the glass seal is not damaged. The cutting or bending point should be no closer than 3mm (0.118in.) to the glass to metal seal and the lead should be supported between the cutting or bending point and the glass to metal seal.
- We offer a crop and form service for Reed Switches to be customized to your specification.

ORDERING INFORMATION

