
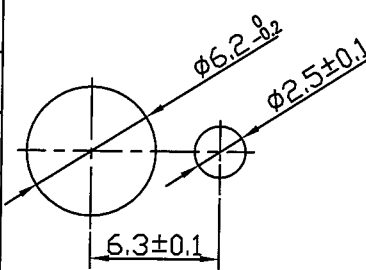


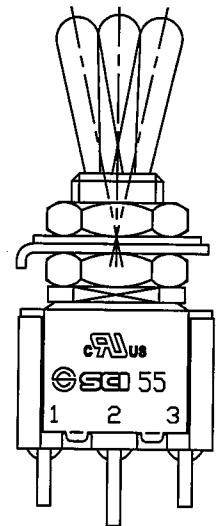
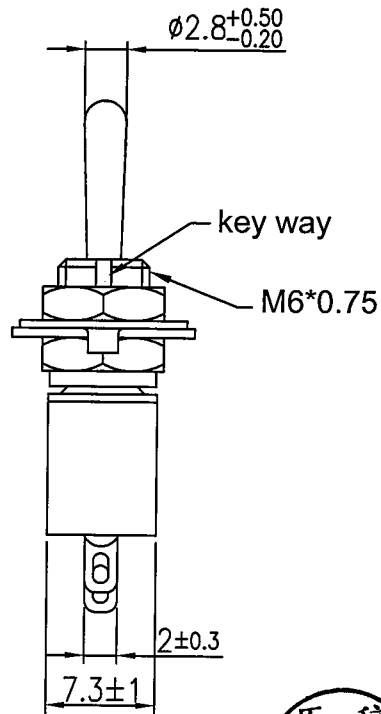
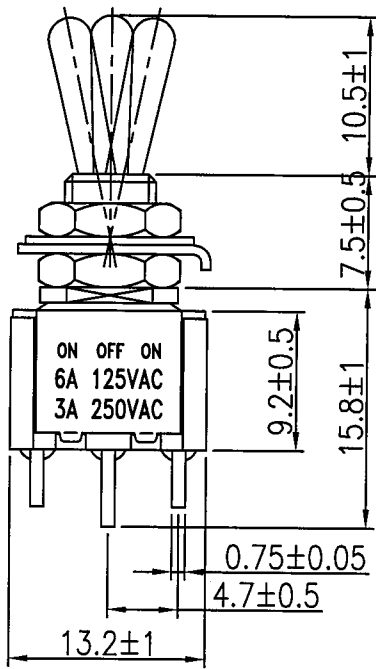


Rating	6A 125V AC, 3A 250V AC 	Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1000V 1 minute		
Switch Function	3P SPDT (ON)-OFF-ON		
Base color	Black		



2 HEX NUT ASSY
 1 LOCKER WASHER ASSY
 1 LOCATING RING ASSY

ON OFF (ON)



原稿
 2017.6.21
 研發部