

WPG series

Switch guard for switch series WP



DISTINCTIVE FEATURES

Prevent accidental lever operation
Latching



ENVIRONMENTAL SPECIFICATIONS

- Salt spray test: 96 hours (IEC 68-2-11)
- Operating temperature: -40 °C to +85 °C (-40 °F to +185 °F)
- Front panel sealing: IP67 according to IEC 60529



MATERIALS

- Support plate: black chrome plated brass
- Guard: Stainless steel
- Seal: fluorinated silicone, black




WPG series

Switch guard for switch series WP



BUILD YOUR PART NUMBER

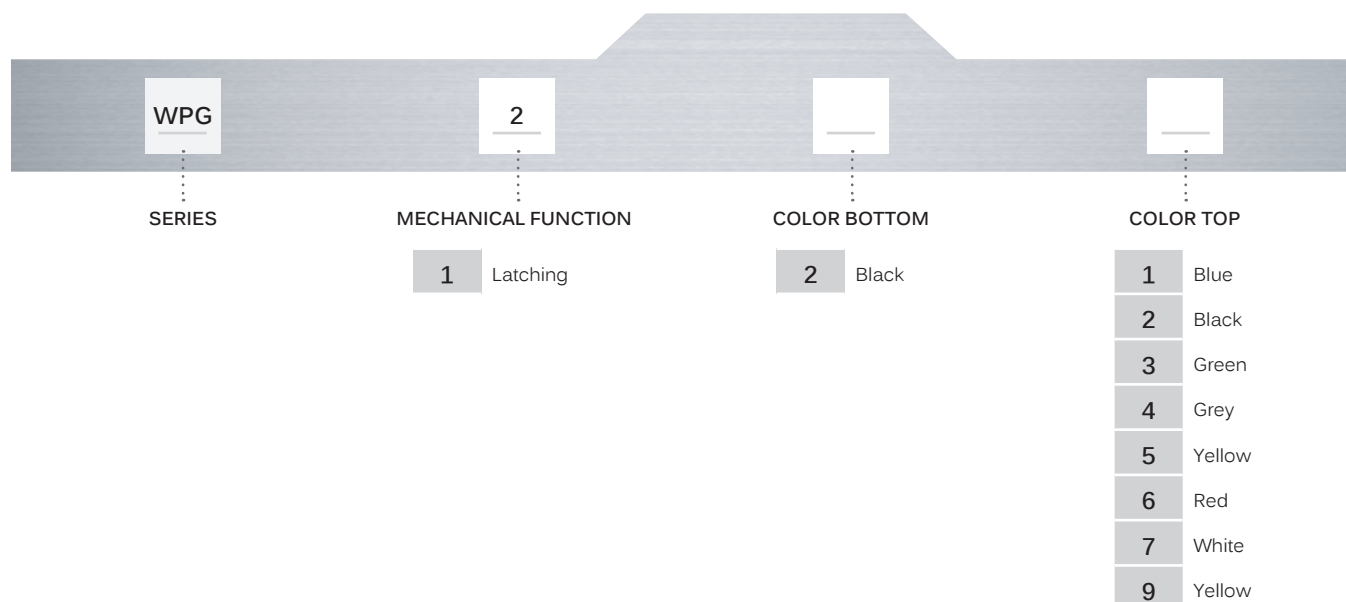

ABOUT THIS SERIES



Mounting accessories: one seal supplied, thickness of the seal: 1.1 mm (-0/+0.1 mm)

WPG series

Switch guard for switch series WP

DIMENSIONS

