



# **Magnetic Contact Switches**

### **Specification: MCS-121 Series**


- \*Mini stick on contact with flange
- \*Side leads with #22 AWG 18" length
- \*Adhesive and screw mount included
- \*Switch or Magnet are available separately
- \*Specials leads available on request
- \*Resistor, Diode and Supervisory Loop available on request
- \*Colours: White, Brown, Grey

#### Surface mounted



 $\epsilon$ 

## **Dimensions (mm)**

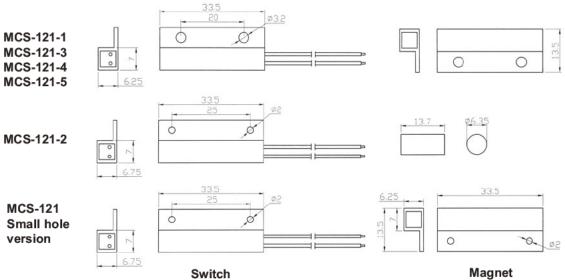



Note: For small hole version please add S after the color letter

# Order Information X denotes colour W=White, B=Brown, G= Grey

Part Number	Loop Type	Reed Form	Closed Gap Inch (mm)	Departure Gap Inch (mm)	Max Initial Contact Resistance (Ohm)	Max Initial Contact rating (W)	Max Switching Voltage (VDC/VAC)	Max Switching Current (A)
MCS-121-1X	Closed	N/O	1 (25)	0.6 (17)	0.150	10	100	0.5
MCS-121-2X	Closed	N/O	1 (25)	1.1 (28)	0.150	10	100	0.5
MCS-121-3X	Closed	N/O	1¼ (31)		0.150	10	100	0.5
MCS-121-4X	Open	N/C	1 (24)		0.150	3	30	0.2
MCS-121-5X	Open & Closed	SPDT	1 (24)		0.150	3	30	0.2