

# IF series

Sealed pushbutton switches  
with  $\varnothing$  25 mm actuator • bushing dia. 16 mm



## DISTINCTIVE FEATURES

- Can be operated with gloved hands
- Snap-in and threaded bushing models
- Resistant to frost
- Sealed to IP54 or IP67



## ENVIRONMENTAL SPECIFICATIONS

- Front panel sealing (switches mounted on panel) :
  - IP67 (threaded bushing models)
  - IP54 (snap-in models)
- Operating temperature : -20 °C to +85 °C (-4 °F to +185 °F)



## ELECTRICAL SPECIFICATIONS

- Max. current/voltage rating with resistive load :  
400 mA 32 VAC - 100 mA 48 VDC
- Initial contact resistance : 50 m $\Omega$  max.
- Insulation resistance : 1 G $\Omega$  min. at 500 VDC
- Dielectric strength : 1,000 VAC rms. between terminals and frame  
1,500 VAC between terminals
- Electrical life at full load : 500,000 cycles



## GENERAL SPECIFICATIONS

- Panel thickness :
  - Snap-in models : 0.8 mm (.031) min. - 2.5 mm (.098) max.
  - Threaded bushing models : 0.8 mm (.031) min. - 5 mm (.196) max.
- Total travel : 4 mm (.157)
- Typical operating force : 6.5 N  $\pm$  2 N
- Low level or mechanical life : 1,000,000 cycles
- Torque : 1.5 Nm max. applied to nut
- Soldering : 320 °C (608 °F) max. for 3 seconds

The company reserves the right to change specifications without notice.




## MATERIALS

- Case : thermoplastic UL94-V0
- Actuator : polyamide 12, rubber filled
- Bushing/bezel : polyamide 6/6
- Contacts : solid silver, gold plated
- Terminal seal : epoxy

# IF series


Sealed pushbutton switches  
with Ø 25 mm actuator • bushing dia. 16 mm

## BUILD YOUR PART NUMBER

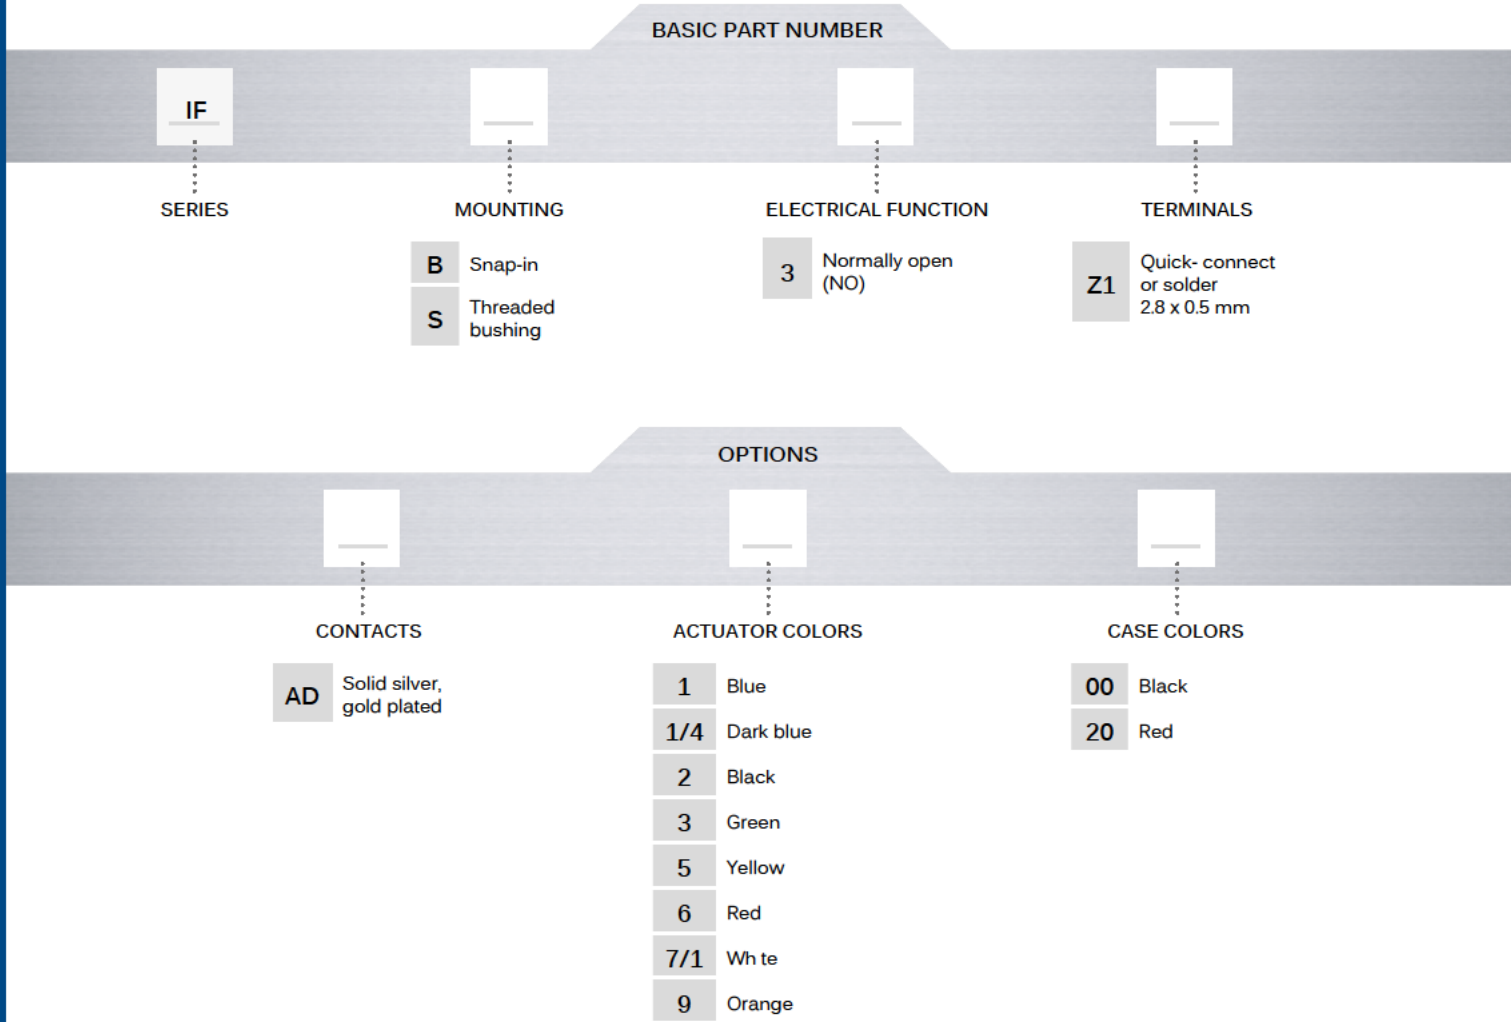



Grey RAL7040 : on request

## ABOUT THIS SERIES

 Mounting accessories : Standard hardware supplied : 1 flat seal (IFB series), 1 flat seal and 1 hex nut 19 mm (.748) across flats (IFS series) . Hex nut part number : 10-621.

## MODELS



Snap-in		
<b>IFB3Z1AD</b>		NO
Threaded bushing		
<b>IFS3Z1AD</b>		NO

